

In-line Fitting EA1630 / EA2630




Characteristics

Compact fitting with Whitworth process connection acc. to DIN ISO 228.
 This In-line fitting has been designed for electrochemical cells like pH/ORP-, conductivity-cells with PG13.5 process connection. It protects the sensor and ensures a proper measurement.
 The fitting is conceived for the application in the chemical industry.

Technical data

Process connection : pipe thread acc. to DIN ISO 228
 Process material : PVDF
 Operating temperature : -10..+120 °C
 steam sterilization 140 °C < 1 h
 Process pressure : max. 16 bar

Dimensions

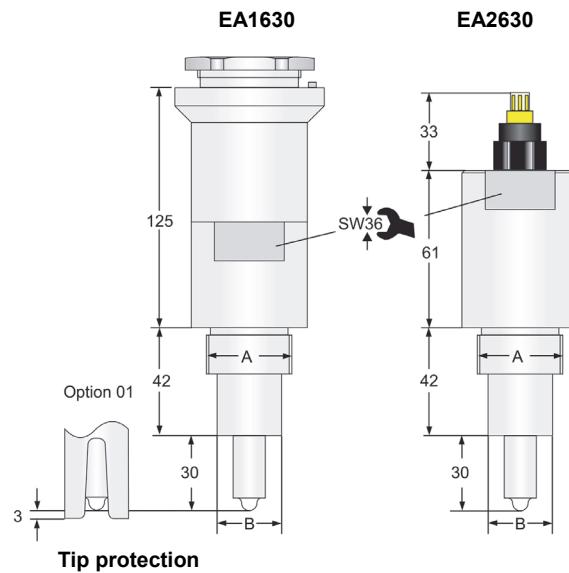

Tip protection

Process connection

A	B
G ¾ A	Ø23.5
G 1 A	Ø25

Ordering code

1. 2. 3. 4.
 EA - - -

1. Model	
1630	head mounting at UNICON-pH
2630	field mounting
2. Process connection (A)	
G ¾ A	
G 1 A	
3. Sensor type	
0	standard pH / ORP combined-electrodes
4. Options	
00	without option
01	with integrated tip protection (only for pH and ORP combined-electrodes)