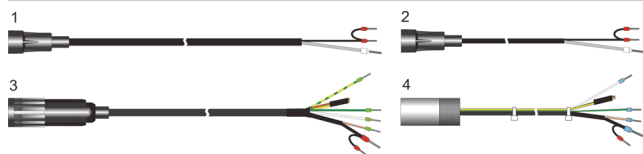


Connection cable


Connection cable 1
for electrodes with S7-connector

Order no.	Length [m]	Protection class
S7-02	2	IP67
S7-05	5	IP67

Connection cable 2
for electrodes with S7-connector at UNICON-pH, head mounting.

Order no.	Length [m]	Protection class
S7-K	-	-

Connection cable 3
for electrodes with SMEK-VP-connector

Order no.	Length [m]	Protection class
KVP-03	3	IP67
KVP-05	5	IP67
KVP-10	10	IP67

(not used cables could be cutting)

Connection cable 4
for electrodes with SMEK-VP-connector at UNICON-pH, head mounting.

Order no.	Length [m]	Protection class
KVP-K	-	-

Calibrations tools

WTW technical buffer, 1000 ml with dosing container

Order no.	PH-buffer value
TEP-4	4.01
TEP-7	7.00
TEP-10	10.00



WTW ORP-buffer 250 ml bottle

Order no.	Buffer value [mV]
RH28	427 (pH7)

Storage solutions 250 ml DURAN-glass bottle,
3 mol KCL sterilized

Order no.
pH-AL-250



Cleaning solution 250 ml DURAN-glass bottle,
Pepsin / hydrochloride acid

Order no.
pH-RL-250

Calibration container
for in-front-calibration material PMMA with level sign(20ml) and screw-cap PG13.5.
(the pH-electrode must be screwed-in with the filled container).

Order no.
pH-KR-250



Cleaning container 250 ml, to rinse the electrodes with water,
material PP

Order no.
pH-SB-250

