

Temperature-Meter T1010



- **Measuring input** Pt100 -100.0..+600.0 °C
Pt1000 -50.0..+200.0 °C
- **LED-Display** 14.2 mm red, indicating range ±9999(0) Digit
- **Max. 2 alarm outputs**, relay SPDT
- **Analog output** 0/4..20 mA, 0/2..10 V
- **Field case** with snap lid, 2 x M16x1.5

Characteristics

The Temperature-Meter T1010 is suitable for measurement of temperatures in connection with RTD sensors Pt100, Pt1000. Devices for other temperature sensors are available on request. The measuring input is isolated. The measuring range can be limited in the configuration level. This is identical with the range of the analog output.

Technical data

Power supply

Supply voltage : 230 V AC ±10 %; 115 V AC ±10 %, 24 V AC ±10 % or 24 V DC ±15 %

Power consumption : max. 3.5 VA

Operating temp. : -20..+55 °C

CE-conformity : EN 61326-1:2013
EN 60664-1:2007

Input

Pt100; Pt1000 : -100..+600 °C ; -50..+200 °C

Accuracy : Pt100 or Pt1000 < 0.1% ±2 Digit, max. 100 Ω line resistance

Display

Indicating range : ±9999(0) digit, with leading zero suppression

Additional display : LED 2-digit red, 7 mm (Parameter - and output indicator)

Output

Relay : SPDT < 250 V AC < 250 VA < 2 A, < 300 V DC < 50 W < 2 A

Analog : 0/4..20 mA burden ≤ 500 Ω; 0/2..10 V burden > 500 Ω, **no** isolation, automatic output changing (burden dependent)

- Accuracy : 0.1 %; TK 0.01 %/K

Field case : Material PA6-GF/GFK 15/15

Dimensions : 100x100x60 mm


Weight : max. 450 g

Cable gland : 2 x M16x1.5


Connection : clamp terminals, 0.08..1.5 mm², AWG28..AWG14

Protection class : front IP65, terminals IP20 acc. to BGV A3

Dimensions

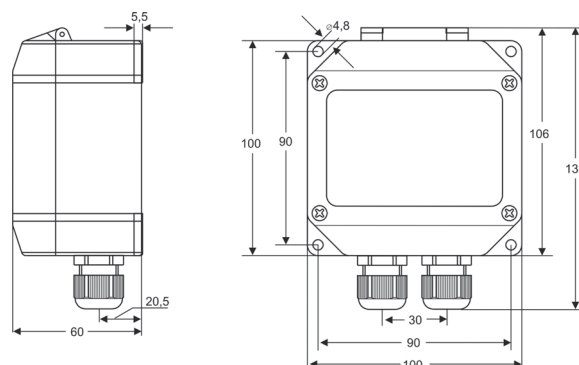

Connection diagram

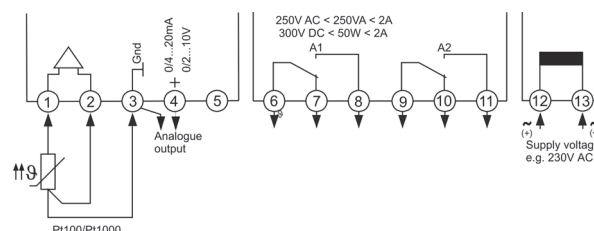

Ordering code

T1010 - 1. - 2. - 3. - 4. - 5. - 6. - 7.

1. Input

1	Pt100	-100.0..+600.0°C
3	Pt1000	-50.0..+200.0°C

2. Alarm output

00	not installed
2R	2 relay SPDT

3. Analog output

00	not installed
AO	analog output 0/4..20 mA, 0/2..10 V DC

4. Supply voltage

0	230 V AC	±10 %	50-60Hz
1	115 V AC	±10 %	50-60Hz
4	24 V AC	±10 %	50-60Hz
5	24 V DC	±15 %	

5. Options

00	without option
01	min-max-value hold
07	display brightness programmable
09	1xM20x1.5 multi (2xØ 6 mm), 1xM20x1.5

6. Unit (appears in the unit field)

7. Additional text above the display (3x70 mm HxW)