



## HD2101.1 AND HD2101.2 HYGRO-THERMOMETERS

The **HD2101.1** and **HD2101.2** are portable instruments with a large LCD display. They measure relative humidity and temperature using a Pt100 sensor or thermocouple humidity/temperature combined probe. Temperature only is measured by immersion, penetration air or contact probes. The sensor can be a Pt100 or Pt1000.

When the humidity/temperature combined probe is connected, the instrument calculates and displays the absolute humidity, the dew point, the partial vapour pressure, the wet bulb temperature, the mixing ratio, the enthalpy and the **comfort indices**.

The probes are fitted with an automatic detection module, with the factory calibration data already stored inside.

The HD2101.2 is a **datalogger**. It stores up to 38,000 samples which can be transferred from the instrument connected to a PC via the RS232C and USB 2.0 serial ports. The storing interval, printing, and baud rate can be configured using the menu. Both models are fitted with an RS232C serial port and can transfer the acquired measurements in real time to a PC or to a portable printer.

The Max, Min and Avg function calculate the maximum, minimum or average values. Other functions include: the relative measurement REL, the HOLD function, and the automatic turning off that can also be excluded.

The instruments have IP66 protection degree.

## INSTRUMENT TECHNICAL CHARACTERISTICS

### Instrument

Dimensions (Length x Width x Height)	185x90x40mm
Weight	470g (complete with batteries)
Materials	ABS, rubber
Display	2x4½ digits plus symbols Visible area: 52x42mm

### Operating conditions

Operating temperature	-5...50°C
Storage temperature	-25...65°C
Working relative humidity	0...90%RH without condensation

**Protection degree IP66**

### Power

Batteries	4 1.5V type AA batteries
Autonomy	200 hours with 1800mAh alkaline batteries
Power absorbed with instrument off	20µA
Mains	Output mains adapter 12Vdc / 1000mA

### Measuring unit

°C - °F - %RH - g/kg - g/m<sup>3</sup> - hPa - J/g - Td  
Tw - DI - NET

### Security of stored data

Unlimited, independent of battery charge conditions

### Time

Date and time	In real time
Accuracy	1min/month max drift

### Measured values storage - model **HD2101.2**

Type	2000 pages containing 19 samples each
Quantity	Total of 38000 samples
Storage interval	1,5,10,15,30s; 1,2,5,10,15,20,30min; 1hour

### Serial interface RS232C

Type	RS232C electrically isolated
Baud rate	Can be set from 1200 to 38400 baud
Data bit	8
Parity	None
Stop bit	1
Flow Control	Xon/Xoff
Serial cable length	Max 15m
Print interval	Immediate or 1,5,10,15,30s; 1,2,5,10,15,20,30min; 1hour

### USB interface - model **HD2101.2**

Type	1.1 - 2.0 electrically isolated
------	---------------------------------

### Connections

Input module for the probes	8-pole male DIN45326 connector
Serial interface	8-pole MiniDin connector
USB Interface	Mini USB type B
Mains adapter	2-pole connector (positive at centre)

### Measurement of relative humidity by Instrument

Measurement range	0...100%RH
Resolution	0.1%RH
Accuracy	±0.1%RH
Drift after 1 year	0.1%RH/year



HD2101.2



CP23

**Measurement of temperature by Instrument**

Pt100 measurement range	-200...+650°C
Pt1000 measurement range	-200...+650°C
Resolution	0.1°C
Accuracy	±0.1°C
Drift after 1 year	0.1°C/year

**Relative humidity and temperature probes using SICRAM module**

Model	Temperature sensor	Working range		Accuracy	
		%RH	Temperature	%RH	Temp
HP472ACR	Pt100	0...100%RH	-20°C...+80°C	±1,5%RH (10...90%RH)	±0.3°C
HP572ACR	Thermocouple K	0...100%RH	-20°C...+80°C	±2,0%RH (in the remaining range) for T= 15...35°C	±0.5°C
HP473ACR	Pt100	0...100%RH	-20°C...+80°C	-----	±0.3°C
HP474ACR	Pt100	0...100%RH	-40°C...+150°C	-----	±0.3°C
HP475ACR	Pt100	0...100%RH	-40°C...+150°C	±(1,5+1.5% of the displayed value) %RH	±0.3°C
HP475AC1R	Pt100	0...100%RH	-40°C...+180°C	in the remaining temperature range	±0.3°C
HP477DCR	Pt100	0...100%RH	-40°C...+150°C	-----	±0.3°C
HP478ACR	Pt100	0...100%RH	-40°C...+150°C	-----	±0.3°C

**Common characteristics**

**Relative humidity**

Sensor	Capacitive
Measuring range	0÷100%RH
Temperature drift @ 20°C	Max 0.02%RH/°C
Response time %RH at constant temperature	10sec (10÷80%RH; air speed=2m/s) at constant temperature

**Temperature with sensor Pt100**

Temperature drift @ 20°C	0.003%/°C
--------------------------	-----------

**Temperature with thermocouple K - HP572ACR**

Temperature drift @ 20°C	0.02%/°C
--------------------------	----------

Same specifications reported above apply for **HP480** probe (for measuring humidity of the air in pipes), with the following exceptions:

HP480		
Temperature	Measuring range	-40...+60°C
Humidity	Dew point	-40...+60°C DP
Environmental Conditions	Working temperature	-40...+60°C
	Working pressure	16bar max

**TECHNICAL DATA OF PROBES AND MODULES EQUIPPED WITH INSTRUMENT**  
**Temperature probes Pt100 sensor with SICRAM module**

Model	Type	App. range	Accuracy
TP472I	Immersion	-196°C...+500°C	±0.25°C (-196°C...+300°C) ±0.5°C (+300°C...+500°C)
TP472I.0 <i>1/3DIN - Thin film</i>	Immersion	-50°C...+300°C	±0.25°C
TP473P.I	Penetration	-50°C...+400°C	±0.25°C (-50°C...+300°C) ±0.5°C (+300°C...+400°C)
TP473P.0 <i>1/3DIN - Thin film</i>	Penetration	-50°C...+300°C	±0.25°C
TP474C.I	Contact	-50°C...+400°C	±0.3°C (-50°C...+300°C) ±0.5°C (+300°C...+400°C)
TP474C.0 <i>1/3DIN - Thin film</i>	Contact	-50°C...+300°C	±0.3°C
TP475A.0 <i>1/3DIN - Thin film</i>	Air	-50°C...+250°C	±0.3°C
TP472I.5	Penetration	-50°C...+400°C	±0.3°C (-50°C...+300°C) ±0.6°C (+300°C...+400°C)
TP472I.10	Penetration	-50°C...+400°C	±0.30°C (-50°C...+300°C) ±0.6°C (+300°C...+400°C)
TP49A.0 <i>Class A - Thin film</i>	Immersion	-70°C...+250°C	±0.3°C (-70°C...-50°C) ±0.25°C (-50°C...+250°C)
TP49AC.0 <i>Class A - Thin film</i>	Contact	-70°C...+250°C	±0.3°C (-70°C...-50°C) ±0.25°C (-50°C...+250°C)
TP49AP.0 <i>Class A - Thin film</i>	Penetration	-70°C...+250°C	±0.3°C (-70°C...-50°C) ±0.25°C (-50°C...+250°C)
TP875.I	Globethermometer Ø150mm	-30°C...+120°C	±0.25°C
TP876.I	Globethermometer Ø 50mm	-30°C...+120°C	±0.25°C
TP87.0 <i>1/3DIN - Thin film</i>	Immersion	-50°C...+200°C	±0.25°C
TP878.0 <i>1/3DIN - Thin film</i> TP878.1.0 <i>1/3DIN - Thin film</i>	For solar panel	+4°C...+85°C	±0.25°C
TP879.0 <i>1/3DIN - Thin film</i>	For compost	-20°C...+120°C	±0.25°C

**Common characteristics**

Temperature drift @ 20°C	0.003%/°C
--------------------------	-----------


**4 wire Pt100 and 2 wire Pt1000 Probes**

Model	Type	Application range	Accuracy
TP47.100.0 <i>1/3DIN - Thin film</i>	Pt100 4 wires	-50...+250°C	1/3DIN
TP47.1000.0 <i>1/3DIN - Thin film</i>	Pt1000 2 wires	-50...+250°C	1/3DIN
TP87.100.0 <i>1/3DIN - Thin film</i>	Pt100 4 wires	-50...+200°C	1/3DIN
TP87.1000.0 <i>1/3DIN - Thin film</i>	Pt1000 2 wires	-50...+200°C	1/3DIN

**Common characteristics**

Temperature drift @ 20°C	
Pt100	0.003%/°C
Pt1000	0.005%/°C



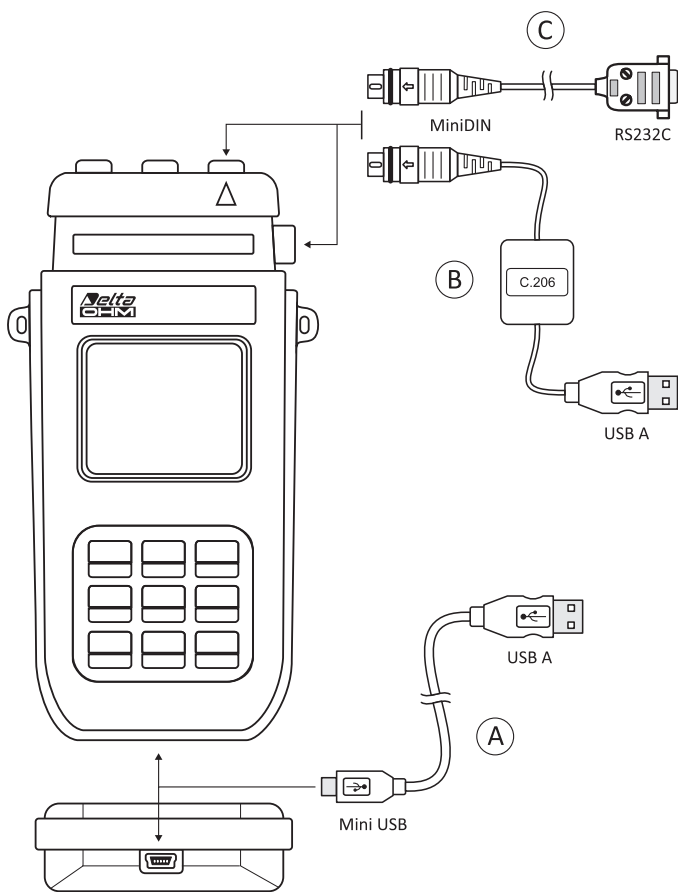

A All models of the portable data logger series **HD21 .... 2** have been implemented with a new serial miniUSB port type HID (Human Interface Device). To connect to the PC with the USB cable Type A - Mini USB B-type code CP23, **it is not required to install any USB drivers.**

B For connecting the **HD21..1** models to the USB port of a PC, USB/serial converter **C.206** is available.

The converter is provided with its own drivers that have to be installed before connecting to the PC. (see the details in the CDRom provided with the converter).

C All models are fitted with a serial RS232C port using MiniDIN connector. It can be used for connecting to a RS232C serial port of a PC or to the HD40.1 portable printer with the cable HD2110CSNM.

#### ORDER CODES

**HD2101.1:** The kit is composed of the instrument HD2101.1, 4 1.5V alkaline batteries, operating manual, case and DeltaLog9 software. **Probes and cable must be ordered separately.**

**HD2101.2:** The kit is composed of the HD2101.2 datalogger, 4 1.5V alkaline batteries, operating manual, case and DeltaLog9 software. **The probes and cable must be ordered separately.**

**HD2110CSNM:** 8-pole connection cable MiniDin - Sub D 9-pole female for RS232C.

**C.206:** Cable for instruments series HD21..1 to connect directly to the USB Input of a PC.

**CP23:** Connection cable USB 2.0 connector type A - Mini USB type B

**DeltaLog9:** Software for download and management of the data on PC using Windows operating systems.

**SWD10:** Stabilized power supply at 230Vac/12Vdc-1000mA mains voltage.

**HD40.1:** Portable, serial input, 24 column thermal printer, 58mm paper width. It uses the cable HD2110 CSNM (optional).

#### Relative humidity and temperature probes complete with SICRAM module

**HP472ACR:** %RH and temperature combined probe, dimensions Ø 26x170 mm. 2 m connecting cable.

**HP572ACR:** %RH and temperature combined probe, **K thermocouple sensor.** Dimensions Ø 26x170 mm. 2 m connecting cable.

**HP473ACR:** %RH and temperature combined probe. Dimensions: handle Ø 26x130 mm, probe Ø 14x120 mm. 2m connecting cable.

**HP474ACR:** %RH and temperature combined probe. Dimensions: handle Ø 26x130 mm, probe Ø 14x215 mm. 2m connecting cable.

**HP475ACR:** %RH and temperature combined probe. 2 m connecting cable. Handle Ø 26x110 mm. Stainless-steel tube Ø 12x560 mm. Terminal tip Ø 14x75 mm.

**HP475AC1R:** %RH and temperature combined probe. 2 m connection cable. Handle Ø 26x80 mm. Stainless steel stem Ø 14x480 mm.

**HP477DCR:** %RH and temperature combined sword probe. 2 m connecting cable. Handle Ø 26x110 mm. Probe tube 18x4 mm, length 520 mm.

**HP478ACR:** %RH and temperature combined probe. Dimensions Ø 14x130 mm. 5m connection cable.

**HP480:** Probe for the measurement of air humidity in pipes. 2m connecting cable. 1/4" Italian Standard quick coupling. AISI 304 measuring chamber.

#### Temperature probes complete with SICRAM module

**TP472I:** Wire wound Pt100 sensor, immersion probe. Stem Ø 3 mm, length 300 mm. Cable length 2 m.

**TP472I.0:** Thin film Pt100 sensor, immersion probe. Stem Ø 3 mm, length 230 mm. Cable length 2 m.

**TP473P.I:** Wire wound Pt100 sensor, penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 m.

**TP473P.0:** Thin film Pt100 sensor, penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 m.

**TP474C.I:** Wire wound Pt100 sensor, contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm. Cable length 2 m.

**TP474C.0:** Thin film Pt100 sensor, contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm. Cable length 2 m.

**TP475A.0:** Thin film Pt100 sensor, air probe. Stem Ø 4mm, length 230mm. Cable length 2 m.

**TP472I.5:** Thin film Pt100 sensor, penetration probe. Stem Ø 6mm, length 500 mm. Cable length 2 m.

**TP472I.10:** Thin film Pt100 sensor, penetration probe. Stem Ø 6mm, length 1000mm. Cable length 2 m.

**TP49A.0:** Thin film Pt100 sensor, immersion probe. Stem Ø 2,7mm, length 150mm. Cable length 2 m. Aluminium handle

**TP49AC.0:** Thin film Pt100 sensor, contact probe. Stem Ø 4mm, length 150mm. Cable length 2 m. Aluminium handle

**TP49AP.0:** Thin film Pt100 sensor, penetration probe. Stem Ø 2,7mm, length 150mm. Cable length 2 m. Aluminium handle

**TP875.I:** Wire wound Pt100 sensor, 150mm diameter globe-thermometer equipped with handle. Cable length 2 m.

**TP876.I:** Wire wound Pt100 sensor, 50mm diameter globe-thermometer equipped with handle. Cable length 2 m.

**TP87.0:** Thin film Pt100 sensor, immersion probe. Stem Ø 3 mm, length 70 mm. Cable length 2 m.

**TP878.0:** Thin film Pt100 sensor, contact probe for solar panels. Cable length 2 m.

**TP878.1.0:** Thin film Pt100 sensor, contact probe for solar panels. Cable length 5 m.

**TP879.0:** Thin film Pt100 sensor , penetration probe for compost. Stem Ø8mm, length 1000mm. Cable length 2m.

#### Temperature probes without SICRAM module

**TP47.100.0:** Thin film Pt100 sensor, immersion probe. Stem Ø 3mm, length 230mm. Connection cable 4 wires with connector, length 2 m.

**TP47.1000.0:** Thin film Pt1000 sensor, immersion probe. Probe's Stem Ø 3mm, length 230mm. Connection cable 2 wires with connector, length 2 m.

**TP47:** Module for the connection of Pt100 4-wire and Pt1000 2-wire probes.

**TP87.100.0:** Thin film Pt100 sensor, immersion probe. Stem Ø 3mm, length 70mm. 4-wires connection cable with connector, length 1 m.

**TP87.1000.0:** Thin film Pt1000 sensor, immersion probe. Stem Ø 3mm, length 70mm. 2-wires connection cable with connector, length 1 m.

**Accessories**

**HD33:** Saturated solution at 33.0%RH@20°C for calibration of relative humidity probes, fixing adapter M24x1.5, M12x1.

**HD75:** Saturated solution at 75.4%RH@20°C for calibration of relative humidity probes, fixing adapter M24x1.5, M12x1.

*Protection for humidity probes Ø 26 M24x1,5*

**P1:** Stainless steel 200µ grid protection for probes Ø 26 mm.

**P2:** 20µ sintered polyethylene PE protection for probes Ø 26 mm.

**P3:** 20µ sintered bronze protection for probes Ø 26 mm.

**P4:** 20µ sintered PE complete cap for probes Ø 26 mm.

*Protection for humidity probes Ø 14 M12x1*

**P6:** 10µm sintered complete protection made of AISI 316 stainless steel for probes Ø 14 mm.

**P7:** 20µm sintered complete protection made of PTFE for probes Ø 14 mm.

**P8:** 10µm stainless steel grid and Pocan protection for probes Ø 14 mm.