

Plug-in Display GIA0420-M12 / -VO



GIA0420-M12



GIA0420-VO

- For all sensors with 4-20mA output and M12 connection or
- Flexible scalable display -1999..9999 digits - adjustable for all measuring ranges
- Display device adaptable to all installation situations, 340° rotating display, plug rotatable 360° in 8 positions
- Monitoring of sensor defect and range violation
- No external supply necessary: power supply via current loop!
- Voltage drop only 2 V

Features

4-20 mA sensor systems are very popular thanks to their simplicity and durability - and, not lastly, due to the affordable system costs.

Our GIA 0420-M12 plug-in display can be used for countless 4-20 mA sensors with an M12 connection for detection of pressure, temperature, flow, fill level, pH, etc.

A special feature is the flexibly pivoting display - sensors are frequently installed in inaccessible locations where a standard 90° orientation is of little help.

Technical data

| | |
|----------------|--|
| Input signal | : 4..20 mA, (2-wire) |
| Voltage load | : approx. 2 V |
| Supply current | : from current loop |
| Accuracy | : ±0.2 % FS ±1 digit (at nominal temperature = 25 °C) |
| Display | : 10 mm high LCD display |
| Display range | : -1999..+9999 |
| CE Conformity | |
| EMC | : 2014/30/EU |
| ATEX | : 2014/34/EU |

Explosion protection

| | |
|--------------|--|
| Type | : GIA0420VO-EX-00 |
| Zone 1/2 | : II 2G Ex ia IIC T4 |
| Limit values | : Ui=28V; Ii=100mA; Pi=1,2W Ci≤13nF; Li= negligibly small |

| | |
|----------------|--|
| Decimal point | : xxxx; xxx.x; xx.xx; x.xxx |
| Scaling | : freely scalable with 3 buttons |
| Measuring rate | : approx. 5 measurements / s |
| Filter | : adjustable |
| Limit | : 3 selectable limit functions LI 0: Range exceeding/undercutting is permissible LI 1: Range exceeding/undercutting is not permissible LI 2: Range limit is displayed when range exceeded/undercut. |


| | |
|--------------------------|---|
| Operation, configuration | : with 3 buttons, Standard : concealed rear housing cover Option T : accessible from outside |
| Operating conditions | : -25...+50 °C / 0...80 % r.h.(non-condensing) |
| Electrical connection | : Special adapter design for - EN175301-803 A connector - M12-A connector, 4-pin Custom terminal assignment as an option. Others on request. |
| Protection class | : IP65 (with correct assembly) |
| Housing | : ABS, foil keypad, front pane made of polycarbonate |

| | |
|------------------------|---------------------------------|
| Dimensions (W x H x D) | |
| without plug connector | : approx. 48.5 x 48.5 x 35.5 mm |
| with plug connector | : approx. 80 x 50.5 x 39.5 mm |



Devices can be rotated to various positions:
X: Housing 340°
Y: Plug connector 360° in 8 positions
Z: Displays 360° (4 positions with screw fitting)

Assembly examples

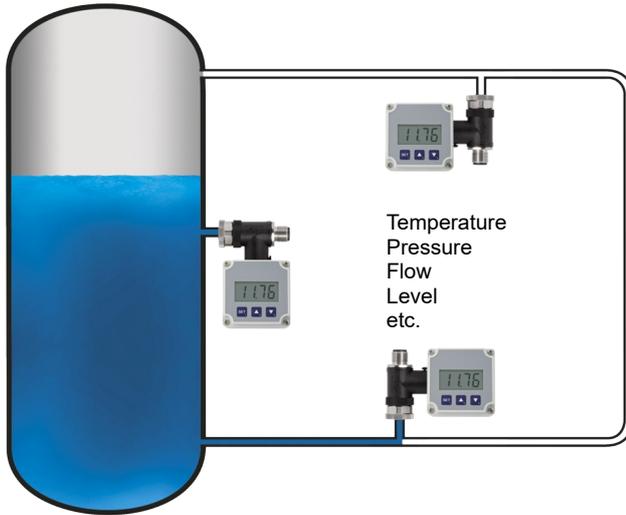


Ordering code

GIA0420 - 1. - 2. - 3.

| | |
|---------------------------------------|--|
| 1. Version | |
| VO | Adapter for EN175301-803 A connector |
| M12 | Adapter for M12-A plug, 4-pole connector |
| 3. Options | |
| 00 | No options |
| EX | Intrinsically safe (VO-type, only) |
| WE | Custom configuration |
| 4. Connection (M12-type, only) | |
| 13 | Special adapter design, 1+, 3- |
| 12 | Special adapter design, 1+, 2- |
| 24 | Special adapter design, 2+, 4- |

Can be installed in a variety of positions

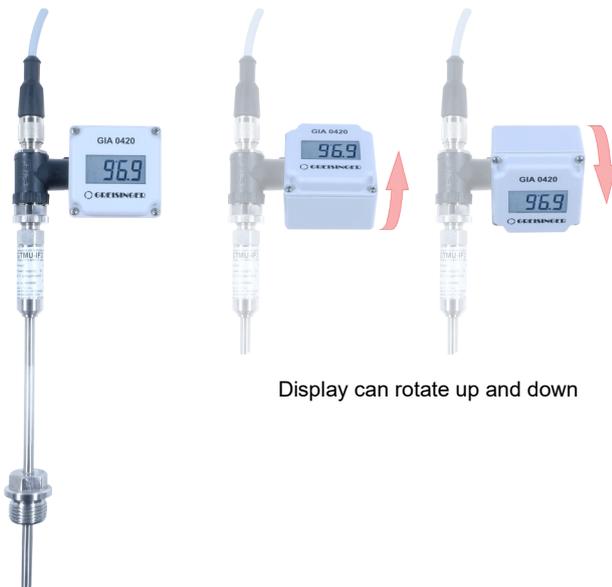

Display can rotate up and down