

Product information

Temperature

Temperature Probe (Surface-Mounted Type) GTMU-OMU



A1

- Optimal adaptability due to 4 different design types
- Ready for assembly

Characteristics

The GTMU-OMU is a temperature probe with integrated transmitter. There are 4 basic design types and 3 sensor types. This ensures optimal adaptability to different conditions like higher temperatures, outdoor usage or wall mounting.

The measurement is done by means of a resistive temperature sensor (Pt100 / Pt1000, 2-, 3- or 4- wire) or thermocouple (NiCr-Ni).

The transmitter is completely customized according to customer requirements.

Technical data

Sensor element : Pt100 (2-, 3- or 4- wire)
Pt1000 (2-, 3- or 4- wire)
NiCr-Ni

Standard measuring ranges

Pt100 / Pt1000 : 0..100 °C, 0..200 °C, -50..+50 °C,
-50..+150 °C

NiCr-Ni : 0..100 °C, -50..+150 °C, -200..+300 °C,
0..600 °C, 0..1150 °C
other measuring ranges upon request

Max. possible measuring range

Pt100 / Pt1000 : -200..+800 °C

NiCr-Ni : -40..+1150 °C

Accuracy

Pt100 / Pt1000 : DIN class B

NiCr-Ni : class 1

Working temperature : 0..70 °C (housing and elbow-type plug)

Housing material : ABS

Probe material : stainless steel

Sensor installation : sensors are isolated

Mounting : with fastening holes for wall mounting

Electrical connection : elbow-type plug (EN 175301-803/A)


Protection class : IP65

	A1	A2	A3	A4
Process connection (standard)	G ½		—	—
Fitting length (standard)	EL = 100 mm	EL = 100 mm	EL = 50 mm	EL = 100 mm
Neck tube length (standard)	—	HL = 50 mm	—	—
Diameter (standard)	D = 6 mm	D = 6 mm	D = 3 mm	D = 6 mm

Design types

A1	with process connection G ½ for screw-in
A2	for higher temperatures, process connection G ½ in distance to housing, HL = length of neck tube
A3	indoor / outdoor probe for wall mounting (potting of electronics necessary for outdoor application)
A4	duct probe with centrally mounted sensor tube pointing downwards

Dimensions

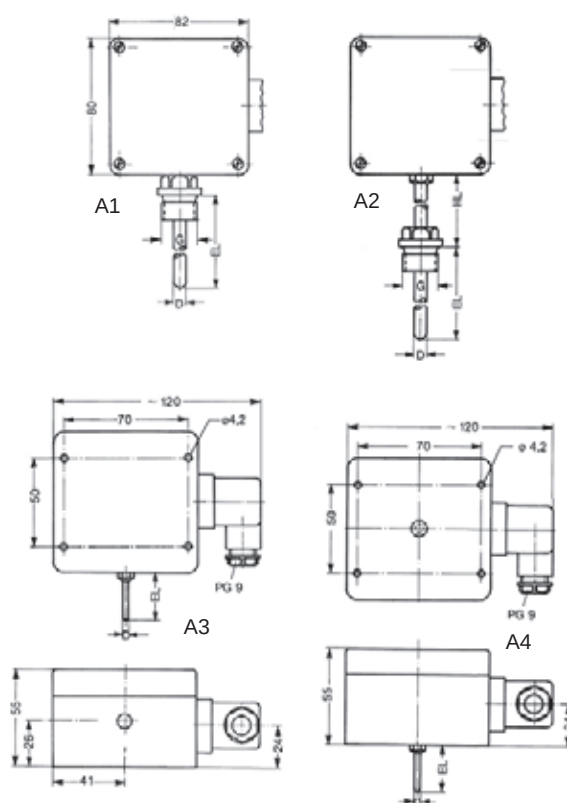

continued on next page

Product information

Temperature

Ordering code

GTMU-OMU - 1. - 2. - 3. - 4. - 5. - 6. - 7.

1. Design type		
A1	as per description	
A2	as per description	
A3	as per description	
A4	as per description	
2. Sensor element		
P	resistance thermometer Pt100	
T	resistance thermometer Pt1000	
K	thermocouple NiCr-Ni	
3. Measuring range (MB)		
MB1	0..100 °C	P / T / K
MB2	-50..+150 °C	P / T / K
MB3	0..200 °C	only P / T
MB4	-50..+50 °C	only P / T
MB5	-200..+300 °C	only K
MB6	0..600 °C	only K
MB7	0..1150 °C	only K
MBx	desired measuring range (e.g. -50..+400 °C) max. possible measuring range: Pt100: -200..+800 °C / NiCr-Ni: -200..+1150 °C	
4. Fitting length EL		
050	50 mm (standard A3)	
100	100 mm (standard A1, A2, A3)	
xxx	any EL in mm (e.g.: 200 = 200 mm)	
5. Probe diameter D		
3	Ø 3 mm (standard A3)	
4	Ø 4 mm	
5	Ø 5 mm	
6	Ø 6 mm (standard A1, A2, A4)	
8	Ø 8 mm	
6. Process connection G (only at design type A1 and A2)		
G1	G ½, V4A (Standard)	
G2	G ¼,V4A	
G3	G ¾,V4A	
G5	G ⅜, V4A	
M5	M5, V4A	only D = 3 mm possible
M6	M6, V4A	only D = 3 mm possible
M8	M8, V4A	max D = 5 mm possible
M0	M10, V4A	max D = 6 mm possible
M2	M12, V4A	
7. Length of neck tube HL (only at design type A2)		
050	50 mm (standard)	
xxx	any HL in mm (e.g.: 100 = 100 mm)	