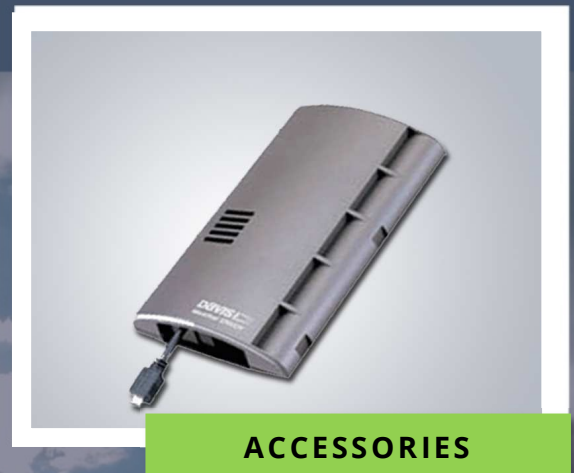


Vantage Pro2 Weather Envoy

cabled receiving & transmitting unit


ACCESSORIES

Vantage Pro2 Weather Envoy

art.no. **6316CEU**

Cabled Envoy unit receiving weather data of an integrated Vantage Pro2 sensor suite or a special station and transmitting it to a computer. Thus, no console is required for visualization, but the WeatherLink data logger and the software package. The Weather Envoy can also be operated by means of a variety of different sensors. The unit contains a barometer and an indoor temperature and humidity sensor.

scope of delivery:

- cabled Envoy unit with AC-power adapter (power supply 220 V/50 Hz).
- cabled unit may also be run using three AA batteries.
- integrated barometer, indoor temperature and humidity sensor

indoor temperature	meas. range:	0.0°C bis +60.0°C
	resolution:	0.1°C
	accuracy:	±0.5°C
	optionally in °F	
barometric pressure	meas. range:	410.0 mmHg to 820.0 mmHg or 540.0 mbar (hPa) to 1,100.0 mbar (hPa)
	resolution:	0.1 mmHg 0.1 mbar (hPa)
	accuracy:	±0.8 mmHg ±1.0 mbar (hPa)
	air pressure can optionally be measured in inch (in), millimeters mercury (mmHg), millibar (mbar) or hectopascal (hPa)	
	transmission of air pressure tendency: transmits the current air pressure tendency of the past three hours	
relative humidity (indoors)	meas. range:	1 % to 100 %
	resolution:	1 %
	accuracy:	±3 %
time and date	resolution:	1 minute (time) 1 day/month (date)
	accuracy:	±8 seconds/month
	time: 12 or 24 hour format	
	date: „day/month“ or „month/day“ format	

Order directly online at: www.gsg-e-shop.com


GSG Geologie-Service GmbH

Am Sand 9, 97080 Wuerzburg (Germany) | Phone: +49 (0) 931 / 30 40 8-0 | Fax: +49 (0) 931 / 99 105-90 |
E-Mail: mail@geologie-service.de | www.geologie-service.com

Vantage Pro2 Weather Envoy

cabled receiving & transmitting unit

**ACCESSORIES**

general information	dimensions (L xW x D):	165 mm x 95 mm x 38 mm
	weight:	approx. 0.26 kg
	housing material:	UV-resistant PVC plastic
	current draw:	10 mA (average), 15 mA (peak) at 4 to 6 VDC
	AC power adapter:	5 VDC, 200 mA, regulated
	batteries:	3 AA-cells
	battery life:	up to 1 month
	permissible operating temperature:	-10°C to +60°C
	connectors:	modular RJ-11
	cable type:	4-conductor, 26 AWG

Order directly online at: www.gsg-e-shop.com



GSG Geologie-Service GmbH

Am Sand 9, 97080 Wuerzburg (Germany) | Phone: +49 (0) 931 / 30 40 8-0 | Fax: +49 (0) 931 / 99 105-90 |
E-Mail: mail@geologie-service.de | www.geologie-service.com