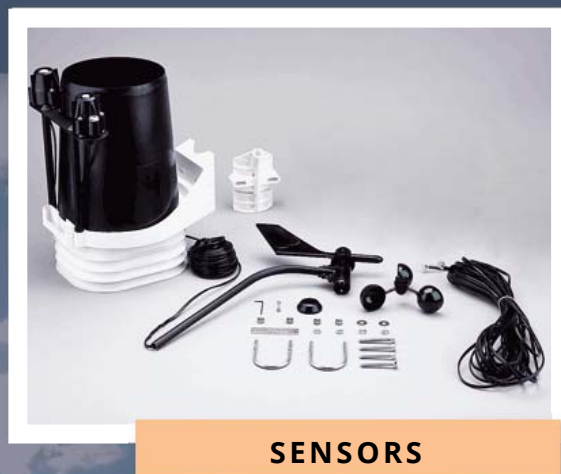


Vantage Pro2 Plus

(UV / solar sensor incl.)

integrated sensor suite (ISS)


SENSORS

Vantage Pro2 Plus ISS

art.no. 6327CM

Cabled integrated sensor suite (ISS) combining a rain collector, temperature and humidity sensor, a solar radiation and UV radiation sensor and anemometer all into one system.

The Vantage Pro2 can also be customized by adding additional displaying and controlling consoles or by choosing special options.

scope of delivery:

- integrated sensor suite (ISS) with rain collector, temperature and humidity sensors, solar radiation and UV radiation sensor and anemometer (passive shield)
- 12 m anemometer cable
- mounting hardware
- 30 m cable from console to integrated sensor suite

wind speed	meas. range:	1.0 m/s to 80.0 m/s or 1 km/h to 320 km/h
	resolution:	0.1 m/s or 1 km/h
	accuracy:	±5 %
	wind speed can optionally be indicated in meters/second (m/s), kilometers/hour (km/h), miles/hour (mph) or knots	
	wind development in connection with WeatherLink only	
wind direction	meas. range:	0° to 360°
	resolution:	1° on numeric display, 22.5° on compass rose
	accuracy:	±3°
outdoor temperature	meas. range:	-40.0°C to +65.0°C
	resolution:	0.1°C
	accuracy:	±0.5°C
	optional indication in °F	
wind chill (calculated value: difference between measured and felt temperature on base of wind speed)	meas. range:	-79°C to +57°C
	resolution:	1°C
	accuracy:	±1°C
	optional indication in °F	
heat index (outdoors) (calculated value: felt temperature based on air temperature and relative air humidity)	meas. range:	-40°C to +74°C
	resolution:	1°C
	accuracy:	±1.5°C
	optional indication in °F	

Order directly online at: www.gsg-e-shop.com



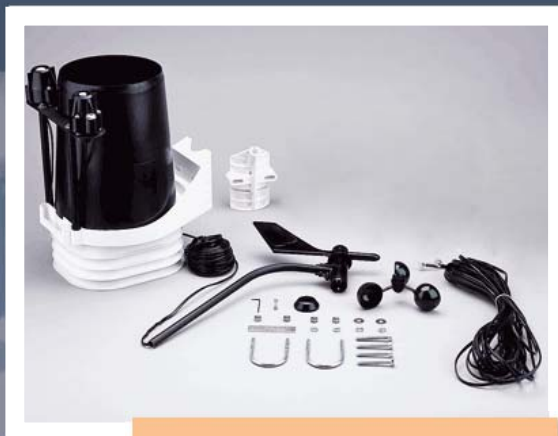
GSG Geologie-Service GmbH

Am Sand 9, 97080 Wuerzburg (Germany) | Phone: +49 (0) 931 / 30 40 8-0 | Fax: +49 (0) 931 / 99 105-90 |
E-Mail: mail@geologie-service.de | www.geologie-service.com

Vantage Pro2 Plus

(UV / solar sensor incl.)

integrated sensor suite (ISS)


SENSORS

relative humidity (outdoors)	meas. range:	1 % to 100 %
	resolution:	1 %
	accuracy:	±3 %
dewpoint (outdoors)	meas. range:	-76°C to +54°C
	resolution:	1°C
	accuracy:	±1.5°C
	optional indication in °F	
precipitation	rainfall	
	meas. range:	0.0 mm to 6,553.0 mm
	resolution:	0.2 mm
	accuracy:	±4 %
	rate of rainfall	
	meas. range:	0.0 mm/h to 2,438.0 mm/h
	resolution:	0.1 mm/h
	accuracy:	±5 % ≤127 mm/h
	precipitation can be indicated optionally in inch (in) or millimeter (mm) respectively in inches/hour (in/h) or millimeters/hour (mm/h)	
solar radiation	meas. range:	0 W/m ² to 1,800 W/m ²
	resolution:	1 W/m ²
	accuracy:	±5 %
	solar energy in connection with WeatherLink only	
UV radiation dose	meas. range:	0.0 MEDs to 199.0 MEDs
	resolution:	0.1 MEDs
	accuracy:	±5 %
UV radiation index	meas. range:	0.0 bis 16.0
	resolution:	0.1
	accuracy:	±5 %
evapotranspiration (ETo)	range:	0.0 mm bis 1,999.9 mm
	resolution:	0.1 mm
	accuracy:	±5 %
	optional indication in inch (in)	

Order directly online at: www.gsg-e-shop.com



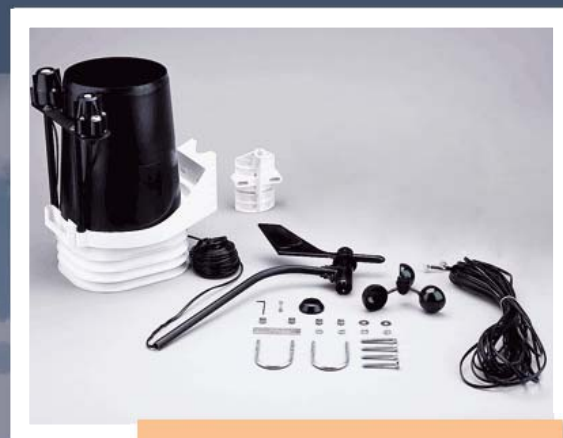
GSG Geologie-Service GmbH

Am Sand 9, 97080 Wuerzburg (Germany) | Phone: +49 (0) 931 / 30 40 8-0 | Fax: +49 (0) 931 / 99 105-90 |
E-Mail: mail@geologie-service.de | www.geologie-service.com

Vantage Pro2 Plus

(UV / solar sensor incl.)

integrated sensor suite (ISS)


SENSORS

general information	ISS
dimensions (L x W x H):	279 mm x 388 mm x 238 mm
weight:	approx. 2.8 kg
housing material:	UV-resistant PVC plastic
power source:	Vantage Pro2 console / AC-power adapter
permissible operating temperature:	-40°C to +60°C
connectors:	modular RJ-11
cable type:	4-conductor, 26 AWG
cable length (anemometer):	12 m (included) 165 m (maximum recommended)

All rights reserved

© 1999 – 2015 GSG Geologie-Service GmbH

page 3 of 3

Order directly online at: www.gsg-e-shop.com



GSG Geologie-Service GmbH

Am Sand 9, 97080 Wuerzburg (Germany) | Phone: +49 (0) 931 / 30 40 8-0 | Fax: +49 (0) 931 / 99 105-90 |
E-Mail: mail@geologie-service.de | www.geologie-service.com